



Supplied by



The lightweight,
powerful, space saving
gas heating solution for
the conversion market

- Suitable for caravans, motorhomes and camper vans
- Compact, space saving heating solution with narrow rotatable design
- Installed underfloor, maximising valuable living and storage space

- Enjoy the great outdoors all year round with total comfort day and night
- At the beach or on the mountain top, use Whale Heat Air anytime and in any season
- Easy to use, intuitive control panel

More for the manufacturer...



Less Weight

Compact and lightweight design



More Space

Increased bunk space, full length wardrobes and longer beds



Design Freedom

Customisable installation creating a blank canvas for vehicle designers



Connectivity

CI-BUS control compatibility



More Options

Wide range of models with efficient performance to maximise comfort

More for the user...



Fast heat up and fully automatic output modulation for enhanced user comfort



Quiet night time operation for when you need it most



Cosy van all year round



Even and well maintained heat distribution




Easy to use, no fuss controls

Technical Specifications











		HEAT AIR 4 G	
Conformity	CE	CE677877	
	ECE R122	E13 122R - 000174	
	ECE R10	E11 10R-10791*00	
	Ingress Protection	IP 45	
Gas	Type	Butane/Propane 30mbar - CAT I _{3B/P(30)}	
	Heat Output [kW]	1.4, 2.8, 4.1	
	Consumption [g/h]	109, 233, 342	
Electric 12V DC	Voltage [V]	10.1 to 15.9	
	Current Draw Range [A]	0.6 - 4.5	
	Current Draw Average [A]	1.4	
	Standby* [A]	0.008	
	Rated Fuse Size [A]	10	
Temperature	Storage [°C]	-40 to +70	
	Operation [°C]	-20 to +50	
	Control [°C]	+5 to +32	
Physical	Dimensions L x W x H [mm]	469 x 165 x 175	
	Weight [kg]	5.5	
	Max Air Flow @ 0.5mbar [m3/h]	150	
	Altitude Range** [m]	0 - 2750	

*Standby Current Draw for Heater only **Output of heater may be limited at higher altitude depending on ambient and operating conditions.

Whale Heat Control Panel




← 68.75mm →

-  Gas heating button
-  Gas heating standby
-  Gas heating on
-  Adjust temperature
-  Night time setting (approx. 16°C)
-  Frost setting (approx. 5°C)
-  External control standby
-  External control active
-  Lock out indicator
-  Reset button

Typical Underfloor Installation

- A Blown air intake
- B Combustion air intake
- C Exhaust pipe
- D Blown air outlet
- E Gas supply

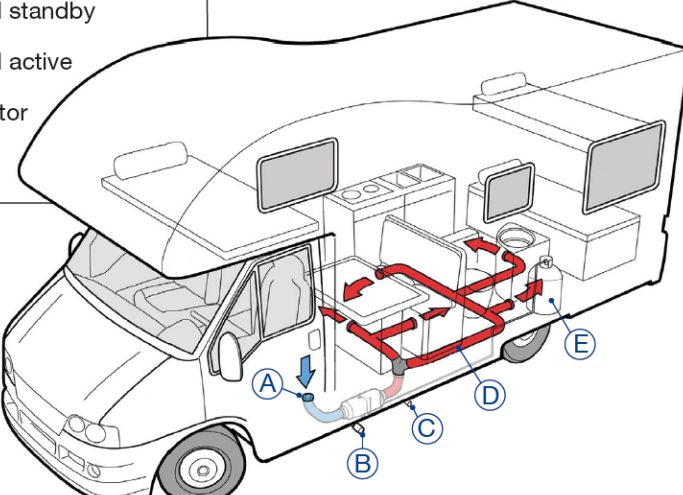

- LIN protocol
- CI-BUS control compatibility
- Easy to use, intuitive design
- Low profile & compact
- Modern capacitive touch technology
- Discrete LED auto dim
- High quality UV resistant polymer

Whale Support

Tel: 0845 217 2933 info@whalepumps.com www.whalepumps.com

Propex Heating and Leisure Ltd. Unit 10 Carvers Trading Estate, Ringwood, Hampshire. BH23 1JS.

www.propexheatsource.co.uk. Tel: 01425 486950